

# VARI\*LITE

## VL800 EVENTPAR




The VL800 EVENTPAR is an LED retro-style event PAR perfect for a modern replacement of classic tungsten PAR fixtures. Designed to bring back the vintage stylings of the original lamps and PAR cans but built with the DNA of Vari-Lite, the VL800 EVENTPAR will be available in both RGBA and warm white (WW) varieties, with output and color reminiscent of tungsten PAR 64 lamps. With an outdoor rating of IP24 for protection against water spray from any direction, the fixture can withstand rainy conditions at your next outdoor event or installation.

# VARI\*LITE

## VL800 EVENTPAR

### FEATURES AND BENEFITS

- **Cost-effective LED PAR built by Vari-Lite** - LED PAR from a brand you trust
- **Retro styling, color, and output** - Looks, feels, and functions like a classic tungsten fixture, but with modern capabilities
- **RGBA and WW versions** - Get that perfect tungsten look with output and color that matches the original fixtures
- **Gel color presets matched to traditional gel numbers** - Use the colors you have always used without the need to change gels
- **Outdoor rated (IP24)** - Rated against water spray from any direction, providing weather protection
- **Adjustable frequency to exceed camera frame rates** - Camera -friendly fixtures for IMAG or live televised events

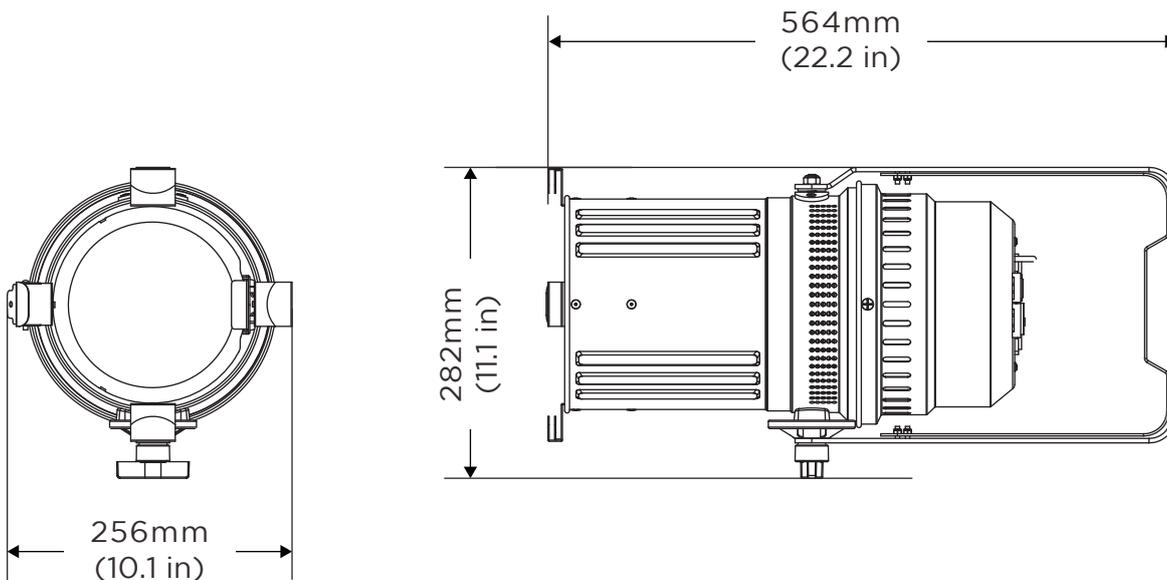



# VL800 EVENTPAR

	RGBA	WARM WHITE		
<b>SOURCE</b>				
Type	LED	LED		
Wattage	1 x 300W RGBA	1 x 200W		
<b>OPTICAL PERFORMANCE</b>				
Output Lumens	3200 lm	10251 lm		
Output CRI	Not applicable	CRI(Ra) >97		
Output CCT	Variable	3000K		
	<b>LUX</b>	<b>FOOT-CANDLES</b>	<b>LUX</b>	<b>FOOT-CANDLES</b>
Narrow @ 5m	4300	399.4	12300	1142.7
Wide @ 5m	295	27.4	940	87.3
Narrow @ 10m	1060	98.5	3400	315.9
Wide @ 10m	90	8.4	300	27.9
<b>BEAM</b>				
Angle	10° - 30°	10° - 30°		
Control	Manual 10°/15°/20°/25°/30°	Manual 10°/15°/20°/25°/30°		
Accessory beam control	Dual rail accessory holder	Dual rail accessory holder		
<b>COLOR SYSTEM</b>				
Color mixing	RGBA (extended blue spectrum control)	Not applicable		
CCT	2700 to 10000K	3000K		
Fixed color	44 calibrated colors	Not applicable		
<b>NOISE LEVELS (BASE LEVEL 18dB)</b>				
Full operation	39dB	39dB		
Standby	25dB	25dB		
Fan modes	Standard, studio, whisper	Standard, studio, whisper		
<b>USER INTERFACE</b>				
Type	Full color invertible screen 4 push button control	Full color invertible screen 4 push button control		
<b>POWER</b>				
Range	100-240 VAC input at 50/60 Hz	100-240 VAC input at 50/60 Hz		
Connector type	PowerCon black/yellow - In / Thru	PowerCon black/yellow - In / Thru		
Wattage (max)	360W	240W		

## VL800 EVENTPAR

DATA CONNECTIONS				
<b>DMX (RDM)</b>	In and Thru 5-pin XLR		In and Thru 5-pin XLR	
<b>DMX modes</b>	<b>16-bit</b>	15 channels	5 channels	
	<b>8-bit</b>	10 channels	4 channels	
		5 channels color mode	1 channel single mode	
PHYSICALS				
<b>IP rating</b>	IP24*		IP24*	
<b>Finish</b>	Black		Black	
DIMENSIONS (H x W x L)				
	mm	in	mm	in
<b>Fixture only</b>	452 x 281 x 418	17.8 x 11.1 x 16.5	452 x 281 x 418	17.8 x 11.1 x 16.5
<b>Packed dimensions</b>	630 x 350 x 390	24.8 x 13.8 x 15.3	630 x 350 x 390	24.8 x 13.8 x 15.3
<b>Hanging type</b>	M12 bolt hole in yoke		M12 bolt hole in yoke	
WEIGHT				
	kg	lb	kg	lb
<b>Fixture only</b>	6.5	14.3	6.5	14.3
<b>Packed weight</b>	<b>Net</b>	6.2	13.7	13.7
	<b>Gross</b>	7.9	17.4	17.4
WARRANTY & APPROBATIONS				
<b>Warranty</b>	2 years		2 years	
<b>Approval / listings</b>	CE, ETL, UL, FCC CSA, RoHS, ISO 9001		CE, ETL, UL, FCC CSA, RoHS, ISO 9001	

PRODUCT NAME	ORDER CODE
VL800 EVENTPAR RGBA LED PAR64, IP24, 6° to 30° manual zoom, black case	<b>912400575001</b>
VL800 EVENTPAR WW LED PAR 64, IP24, 6° to 30° manual zoom, black case	<b>912400575002</b>

©2019 Signify Holding. All rights reserved.

All trademarks are owned by Signify Holding or their respective owners. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Data subject to change.

Ref: 912400575001-100-v00