

VARI*LITE

VL800 EVENTPROFILE



The Vari-Lite VL800 EVENTPROFILE is a compact LED event profile fixture that has the DNA of Vari-Lite built in. This high output framing profile luminaire offers full CYM+CTO color mixing and the signature “Vari-Lite smooth” movement that designers expect. The VL800 EVENTPROFILE includes professional-grade features in a small, tour-ready form factor, supplying a fixed color wheel; static and rotating gobo wheels; and prism, frost, and iris. With camera-ready frequency adjustment options and multi-mode fan control, the VL800 EVENTPROFILE is ready for any application.



VL800 EVENTPROFILE

FEATURES AND BENEFITS

- **Cost-effective, high output LED profile built by Vari-Lite** - affordable LED framing profile from a brand you trust.
- **Full CMY-CTO color mixing** - variable color mixing with saturation control, offering numerous vivid and creative color options
- **Static and rotating gobo wheels, prism, frost, and iris** - professional features in a small form factor. Multiple visual options for a variety of uses.
- **Multi-mode fan control** - adjust settings to control fan noise. Offers a low dB experience across all frequencies, eliminating buzzing or hums from an otherwise quiet device. Mode options include standard, studio, and whisper mode.
- **Adjustable frequency to exceed camera frame rates** - camera friendly fixtures for IMAG or live televised events

PRELIMINARY

VL800 EVENTPROFILE

SOURCE		
Type	LED	
Wattage	350W	
OPTICAL PERFORMANCE		
Output lumens	>14000	
Output CRI	>70	
Output CCT	6500K	
	LUX	FOOT-CANDLES
Narrow @ 5m		
Wide @ 5m		
Narrow @ 10m		
Wide @ 10m		
BEAM		
Angle	9.4-40.9°	
Control	16-bit	
IMAGING		
Gobo wheel 1	1 x rotating gobo wheel, 7 + open	
Gobo wheel 2	1 x fixed gobo wheel, 8 + open	
Framing shutters		
Prism	1 x 3 facet circular prism	
Frost	Medium	
COLOR SYSTEM		
Color mixing	Variable CYM	
CTO	Variable	
Fixed color wheel	6 + open	
MOVEMENT		
Max pan angle	540°	
Full pan speed		
Max tilt angle	270°	
Full tilt speed		
NOISE LEVELS (BASE LEVEL 18.6db)		
Full operation	TBC	
Standby	3m Idle - Full output db	
Fan modes	Standard, studio, whisper	
USER INTERFACE		
Type	4-button color LCD	

VL800 EVENTPROFILE


POWER		
Range	100-240V @ 50/60Hz	
Power in / thru	Powercon in & out	
Connector type	Neutrik TrueOne	
Wattage (max)	575W	
DATA CONNECTIONS		
DMX (RDM)	DMX/RDM	
DMX modes	16-bit EN, 16-bit, clone mode	
PHYSICALS		
IP rating	IP20	
Finish	Black	
DIMENSIONS (H x W x L)		
	mm	in
Fixture only	624 x 375 x 408	25 x 15 x 16
Packed dimensions	720 x 470 x 385	28 x 19 x 15
Hanging centers	107	4.2
Hanging type	Omega	
WEIGHT		
	kg	lb
Fixture only	25	55
Packed weight	Net	29
	Gross	64
WARRANTY & APPROBATIONS		
Warranty	2 years	
Approval / listings	CE, ETL, UL, FCC CSA, RoHS, ISO 9001	

PRODUCT NAME	ORDER CODE
VL800 EVENTPROFILE	91200545005

VL800 EVENTPROFILE


WHEEL 1 - rotating

1	Night sky
2	Circle of Ovals
3	Bricked out
4	Neurons
5	Swirl
6	Cross bars
7	On the rocks
8	Open

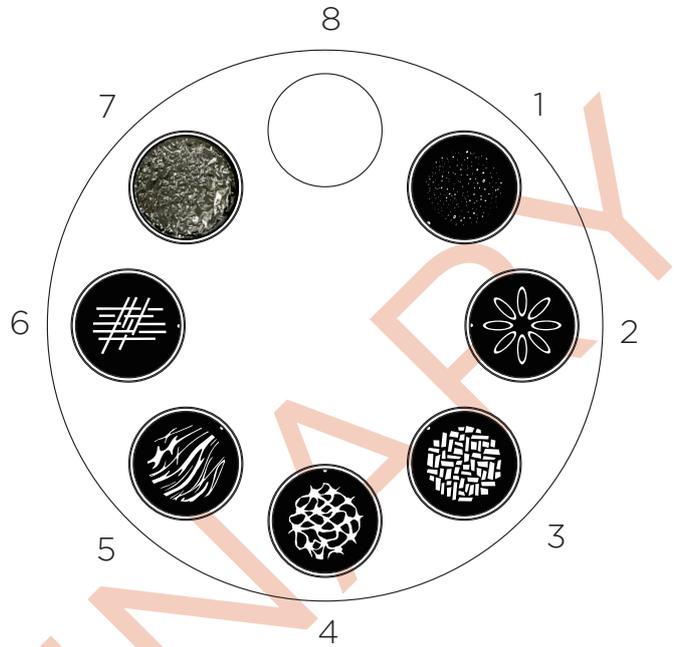


WHEEL 2 - fixed

1	Leafy breakup
2	Honeycomb
3	Radial breakup
4	Grid
5	Punchcard
6	Punchcard
7	
8	
9	Open

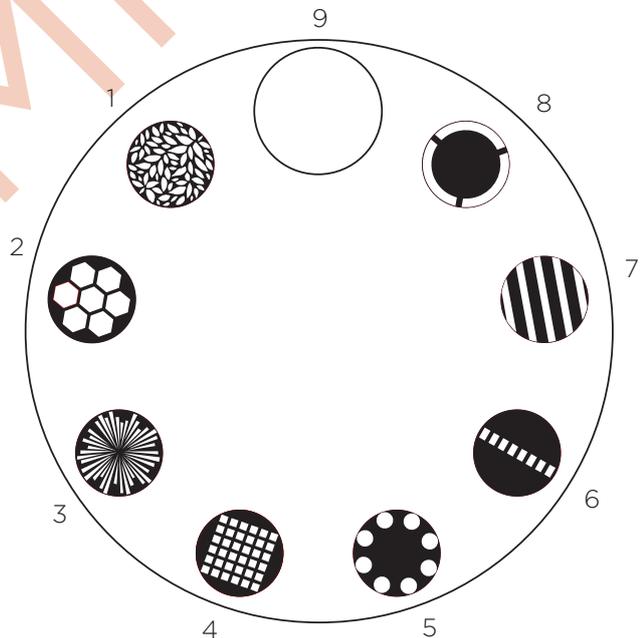

VL800 EVENTPROFILE

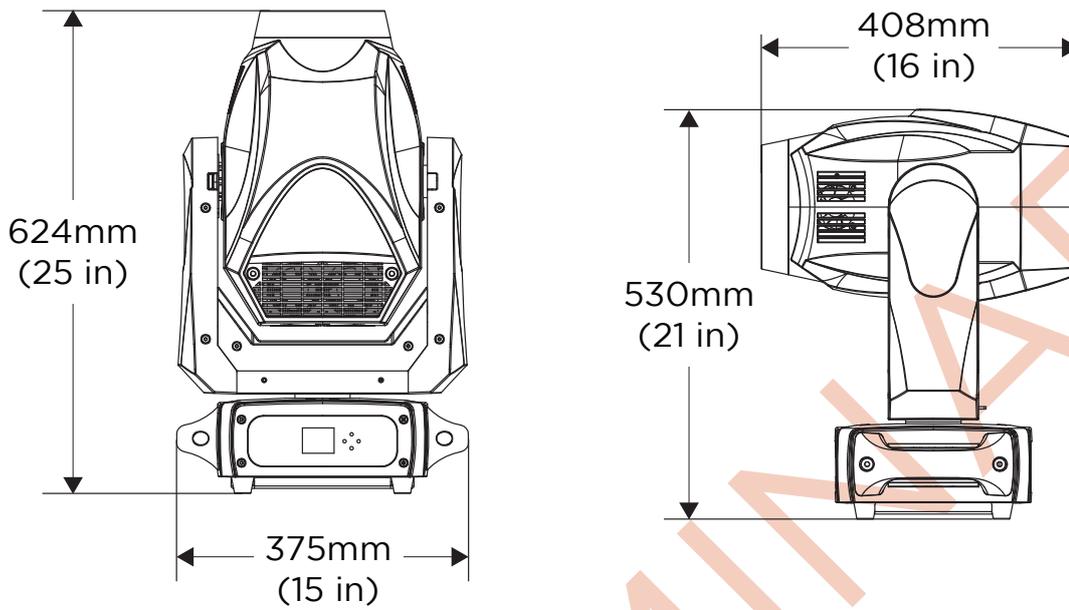

©2019 Signify Holding. All rights reserved.

All trademarks are owned by Signify Holding or their respective owners. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Data subject to change.

Ref: 91200545005-100-v00